

Ancillary Connections

UZ-Clip

The Universal Z-Clip is a multi-functional connector. It is designed to locate and connect flat blockings between I-Joists at the perimeters to support flooring or non-load bearing partitions. The UZ-Clip accommodates 1½" x 3½" blockings - minimum wall support according to Section 9.23.9.8 NBCC 2005.

ADVANTAGES

- Adjacent blocking can be aligned (UZ-Clips placed opposite each other)
- Only one size of nail required

MATERIAL



- 20 ga. (0.036") galvanised mild steel – G90

PERFORMANCE


- Factored resistance 1.5 kN / 337 lbs short term

FASTENER TYPE

- 10dx1½" nail

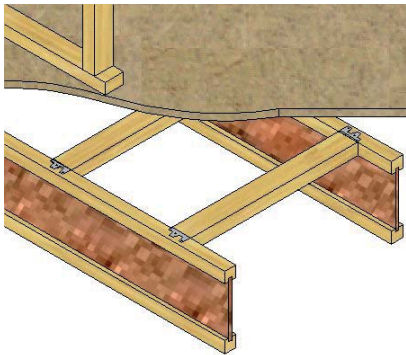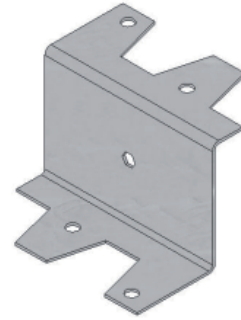

UZ clips supporting non-load bearing partition blocking

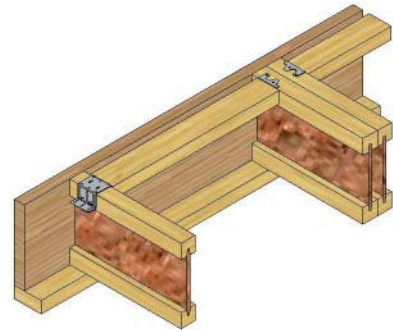

Minimum edge distance
= 1¼"
from centre of 1st nail to end of joist

RS - Rafter Strap

A light gauge steel strap tie – developed to provide resistance to sliding forces in rafter applications.

ADVANTAGES


- Only one size of nail required

MATERIAL

- 16 ga. (0.063") galvanized mild steel – G90

FASTENER TYPE

- 10dx1½" nail

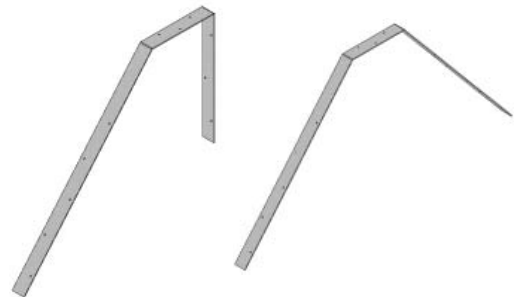

To be site folded to suit ridge beams

